


CSP-3642-6 / CSP-3644-6

WEATHERPROOF IR CAMERA (40M)



Dimension

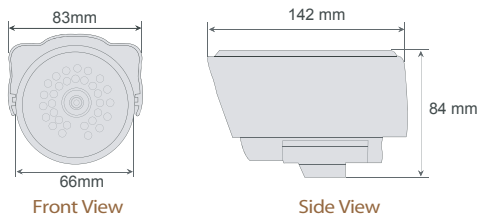

Key Features

- 1/3" SONY Color CCD Sensor
- 420/520 TVL Resolution Color CCD Camera
- Built in 6.0 mm board Lens, 0.00 LUX (IR On)
- Approx 40 meters range for night vision
- Weather resistant housing for outdoor application

Specification


MODEL	CSP-3642-6	CSP-3644-6
Sensor Chip Brand	1/3" Sony CCD	1/3" Sony CCD
Pixels	512(H)x582(V)	768(H)x582(V)
H.Resolution	420TV Lines	520TV Lines
Infrared Ray LED	25	25
Illumination	0Lux(IR ON)	0Lux(IR ON)
S/N Ratio	More than 48dB	More than 48dB
Video Output	1.0Vp-P/75Ω	1.0Vp-P/75Ω
Auto Gain Control	AUTO	AUTO
Auto White Balance	AUTO	AUTO
Exposure Mode	EE	EE
Electronic Shutter	1/50 (1/60) ~ 1/1000000 sec	1/50 (1/60) ~ 1/1000000 sec
Gamma Correction	0.45	0.45
Synchronizing	Internal Sync.	Internal Sync.
Infrared Ray Distance	40Meters	40Meters
Lens Mount	6mm	6mm
Dimension	142(D)x83(W)x84(H)mm	142(D)x83(W)x84(H)mm
Power	DC 12V	DC 12V
Operating Temperature	- 10 ° C ~ +50 ° C	- 10 ° C ~ +50 ° C

CSP-3622-3

WEATHERPROOF IR CAMERA (20M)



Dimension

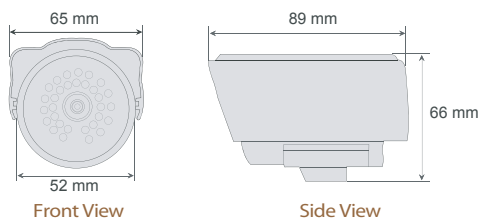

Key Features

- 1/3" SONY Color CCD Sensor
- 420 TVL Resolution Color CCD Camera
- Built in 3.6 mm board Lens, 0.00 LUX (IR On)
- Approx 20 meters range for night vision
- Weather resistant housing for outdoor application

Specification

Model	CSP-3622-3
Sensor Chip Brand	1/3" Sony CCD
Pixels	512(H)x582(V)
H.Resolution	420TV Lines
Infrared Ray LED	24
Illumination	0Lux(IR ON)
S/N Ratio	More than 48dB
Video Output	1.0Vp-P/75Ω
Auto Gain Control	AUTO
Auto White Balance	AUTO
Exposure Mode	EE
Electronic Shutter	1/50 (1/60) ~ 1/1000000 sec
Gamma Correction	0.45
Synchronizing	Internal Sync.
Infrared Ray Distance	20Meters
Lens Mount	3.6mm
Dimension/Weight	89(D)x65(W)x66(H)mm / 322g
Power	DC 12V
Operating Temperature	- 10 ° C ~ +50 ° C